



Center Break Slant Type CBS

Aluminum or Copper

2000A

Pacific Air Break Switch Technology

PASCOR offers versatility and reliability in its entire line of group operated switches. Ideal for either substation or transmission applications, **PASCOR** switches are engineered to the highest standards to meet ANSI requirements. **PASCOR** customizes controls on each switch to suit the application.

Center Break Slant

- Manufactured in either aluminum or copper
- Requires minimum overhead clearance
- Slanted insulators allow for minimum base mounting

Application: Substation & Transmission

- Horizontal upright
- Vertical
- Underhung
- Phase over phase
- Phase opposite phase

Standard Features



- 1/2" Stainless Steel arcing horns
- Brazed silver-to-silver contacts
- Rigid tubular blades
- Stainless steel live parts hardware
- Stainless steel ball bearings 115kV and above
- Stainless steel shaft in bronze sleeve bearing 69kV and below
- Galvanized steel base

Operator Option

- Swing handle
- Worm gear
- Motor operator



Accessories

- Whip type horns
- Single vacuum bottle interrupters
- Ground switches
- Counterweight as required

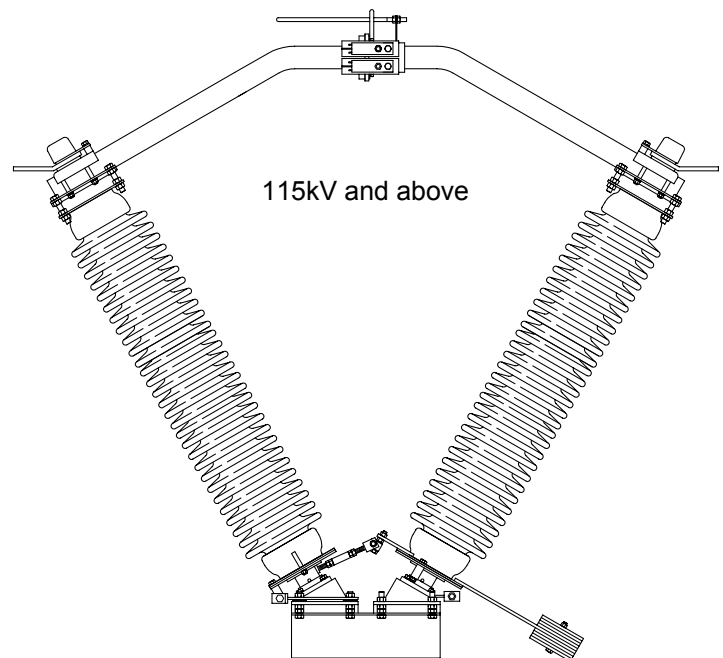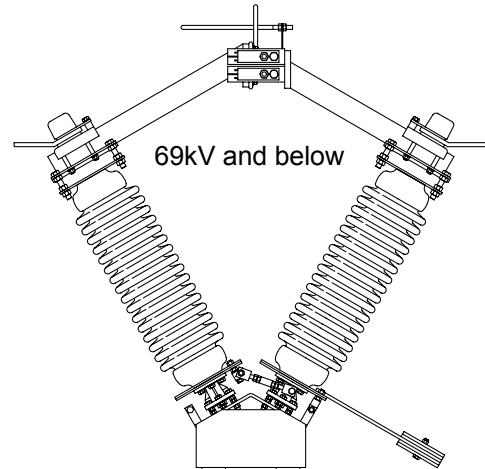


Pacific Air Switch Corporation

P.O. Box 328 , 2615 23rd Avenue, Forest Grove, OR 97116, (503) 359-3939, Fax: (503) 357-0858

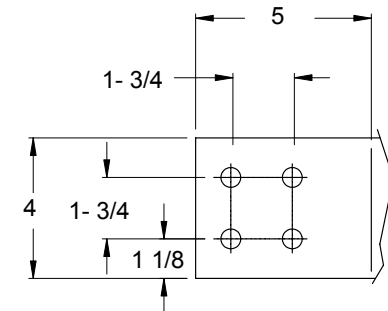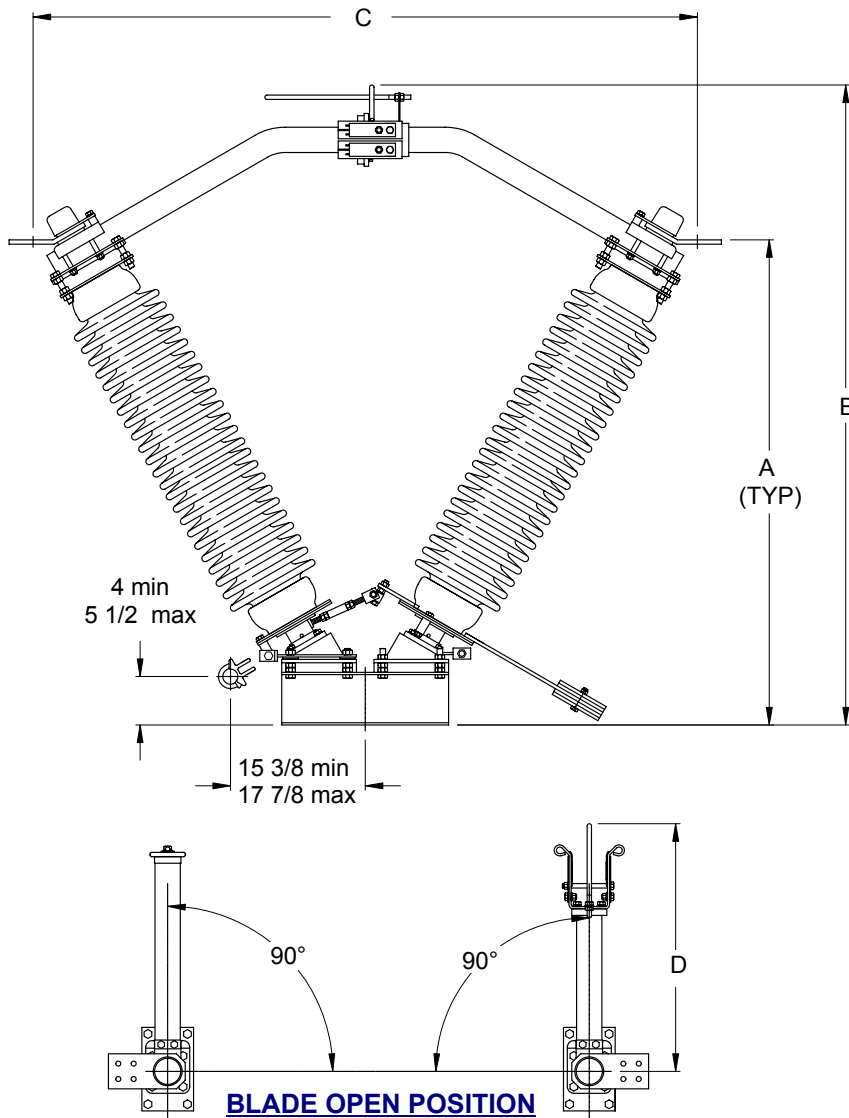

TERMINAL PAD DETAIL

ANSI Standard Hole Pattern
9/16 diameter holes
(Center holes for 600A connector)

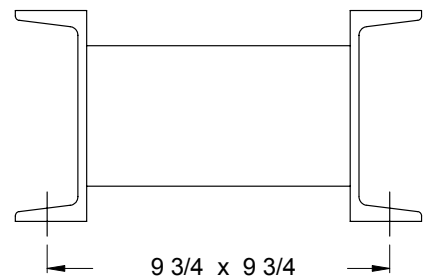

**STANDARD MOUNTING
FOOTPRINT**

kV (nom)	kV BIL	Amps Continuous	kA Mom.	STD. INSUL.	INSUL. BC (IN)	INSUL. HGT (IN)	Dimensions are in inches				
							A	B	C	D	E*
15	110	2000	100	TR205	3	10	24 ^{5/8}	36 ^{3/8}	35	23 ^{3/4}	1480
23	150	2000	100	TR208	3	14	28	41	39	25 ^{3/4}	1540
34.5	200	2000	100	TR210	3	18	31 ^{1/2}	45 ^{5/8}	43	28 ^{1/4}	1606
46	250	2000	100	TR214	3	22	35	50 ^{1/4}	47	30 ^{1/2}	1738
69	350	2000	100	TR216	3	30	41 ^{7/8}	59 ^{1/2}	55	35	1870
115	550	2000	100	TR286	5	45	55 ^{1/4}	72 ^{7/8}	75 ^{5/8}	47	2218
138	650	2000	100	TR288	5	54	63	85 ^{7/16}	84 ^{5/8}	52 ^{1/8}	2362
161	750	2000	100	TR291	5	62	72 ^{3/4}	98 ^{3/8}	98 ^{13/16}	60 ^{3/4}	2752
230	900	2000	100	TR304	5	80	88 ^{3/8}	119 ^{3/8}	116 ^{3/4}	71 ^{1/4}	2980

*Weights are in lbs., and include 3 phases, insulators and controls